

ABBREVIATIONS

ABOVE FINISH FLOOR	A.F.F.
ACOUSTICAL CEILING TILE	ACT
ADJUSTABLE	ADJ
ALTERNATE	ALT
ANCHOR BOLTS	AB
AND	AND
ARCHITECTURAL	ARCH.
AT	AT
BEARING	BRG
BLOCKING	BLKG
BOTTOM	BOT
BOTTOM OF FOOTING	B.F.
BUILDING	BLDG.
BY OWNER	B.O.
CABINET	CAB
CEILING	CLS
CENTER LINE	CL
CERAMIC TILE	CLT
CLEAR	CLR
COLUMN	COL
CONCRETE	CONC
CONNECTION	CONN.
CONTINUOUS	CONT.
DETAIL	DTL
DOUBLE	DBL
DOWEL	DWL
EACH WAY	E.W.
ELEVATION	ELEV. OR EL.
EXISTING	EXIST
EXTERIOR	EXT
FLOOR	FLR
FOOTING	FTG
FOUNDATION	FND
GAUGE	GA
GLU-LAM	GLU
GYP-SUM WALL BOARD	GWB
HEIGHT	HT
HOOK	HK
HORIZONTAL	HORIZ
HOT WATER HEATER	HW
INFORMATION	INFO
INSULATION	INSUL
JOIST	JST
LINEAR FEET	L.F.
LIVE LOAD	LL
LONGITUDINAL	LONGIT.
NOT IN CONCRETE	NIC
ON CENTER	O.C.
PAINTED	PAINT
PERFORATED	PERF.
PLATE	PL
PLYWOOD	PLY
PROPERTY LINE	PROP. LINE
REINFORCEMENT	REINF
REDWOOD	RDWD
REQUIRED	REQD.
RESILIENT	RESIL
REVISED	REV
SHEET METAL	SM
SIMILAR	SIM
SQUARE FEET	S.F.
STANDARD	STD
STEEL	STL
STUDS	STDG.
THICK	THK
TOILET	T.F.H.
TOP OF PLATE	T.P.
TOP OF LEDGE	T.L.
TOP OF WALL	T.W.
TOTAL	TOT
TOWEL BAR	T.B.
TRANSVERSE	TRANSV.
TYPICAL	TYP
UNLESS NOTED OTHERWISE	UNLESS NOTED OTHERWISE
VERIFY IN FIELD	V.I.F.
VERTICAL	VERT.
VINYL WALL COVERING	V.W.C.
WATER CLOSET	WC
WATERPROOF	WP
WATER RESISTANT	WR
WINDOW	W
WITH	W
WOOD	WD

MATERIALS

EARTH	METAL
UNDISTURBED	STEEL
FILL	INSULATION
SAND	BATT
GRAVEL	RIGD
MASONRY	FINISHES
BLOCK	GYP-SUM BOARD
BRICK	PLASTER
STONE	CERAMIC TILE
ASPHALT	STONE
CONCRETE	CARPET
WOOD	MISC
FINISH	OVERFRAMING
ROUGH	
BLOCKING	
PLYWOOD	

SYMBOL LIBRARY

BUILDING SECTION	DETAIL NUMBER SHEET WHERE DRAWN
WALL SECTION	DETAIL NUMBER SHEET WHERE DRAWN
DETAIL MARK	DETAIL NUMBER SHEET WHERE DRAWN
DETAIL REFERENCE	DETAIL NUMBER SHEET WHERE DRAWN
ROOF SLOPE	RISE RUN
ELEV. MARK	ELEVATION 100'-0"
DOOR SYMBOL	
WINDOW SYMBOL	
INT. EL. MARK	ELEV. NUMBER SHEET WHERE DRAWN
NORTH ARROW	NORTH

SHEET INDEX

COVER
A1.0 INFORMATION SHEET
SURVEY
A1.1 SITE PLAN
A1.2 UTILITIES PLAN
A2.1 BUILDING 1 FLOOR PLANS
A2.2 BUILDING 2 FLOOR PLANS
A2.3 BUILDING 3 FLOOR PLANS
A2.4 BUILDING 4 FLOOR PLANS
A2.5 BUILDING 5 FLOOR PLANS
A2.6 BUILDING 1,2,3&4 UNIT PLANS
A2.7 BUILDING 1,2,3&4 END UNIT PLANS
A2.8 BUILDING 5 UNIT PLANS
A2.9 BUILDING 5 END UNIT PLANS
A3.1 BUILDING 1 ELEVATIONS
A3.2 BUILDING 2 ELEVATIONS
A3.3 BUILDING 3 ELEVATIONS
A3.4 BUILDING 4 ELEVATIONS
A3.5 BUILDING 5 ELEVATIONS
A3.6 BUILDINGS 1,2 & 3 ROOF PLANS
A3.7 BUILDINGS 4 & 5 ROOF PLANS
A4.1 BUILDING SECTIONS AND TRASH ENCLOSURE
A4.2 SECTIONS DETAILS
A4.3 STAIR SECTIONS
A4.4 INTERIOR ELEVATIONS
A4.5 INTERIOR ELEVATIONS
A5.1 DETAILS
A5.2 DETAILS
S1.1 BUILDING 1 WEST FOUNDATION PLAN
S1.2 BUILDING 1 EAST FOUNDATION PLAN
S1.3 BUILDING 2 FOUNDATION PLAN
S1.4 BUILDING 3 FOUNDATION PLAN
S1.5 BUILDING 4 FOUNDATION PLAN
S1.6 BUILDING 5 FOUNDATION PLAN
S1.7 BUILDING 5 WEST FOUNDATION PLAN
S2.1 BLDG. 1,2,3&4 FLOOR AND ROOF FRMG PLAN
S2.2 BLDG. 1,2,3&4 END UNITS FRMG PLAN
S2.3 BLDG. 5 FLOOR AND ROOF FRMG PLAN
S2.4 BLDG. 5 END UNITS FRMG PLANS
S3.1 STRUCTURAL DETAILS
E1.1 ELECTRICAL PLAN

PROJECT DATA

OCCUPANCY GROUP:	R-1
GROSS AREA:	BLDG. #1 = 10,578 SQ. FT. BLDG. #2 = 1006 SQ. FT. BLDG. #3 = 1006 SQ. FT. BLDG. #4 = 1006 SQ. FT. BLDG. #5 = 12,165 SQ. FT.
CONSTRUCTION TYPE:	TYPE V (N)
ALLOWABLE AREA:	AREA PER STORY: 6000 SQ. FT. TWO STORIES: 12000 SQ. FT. LOCATION INCREASE: OPEN ON 2 SIDES MIN (21'-3")-20 FT. (1.1 FT) X 1 1/4% = 1 3/8% 12,000 + 1 3/8% = 12,165 SQ. FT.
ALLOWABLE HT:	2 STORIES
GOVERNING CODES:	UBC 1991 UMC 1991 UFC 1991
* NO ACCESSIBILITY/ADAPTABILITY REQUIRED PER UBC	

DOOR SCHEDULE

SYMBOL	SIZE	TYPE
1	1'-6" x 6'-8"	SWING
2	2'-0" x 6'-8"	SWING
3	2'-4" x 6'-8"	SWING
4	2'-6" x 6'-8"	SWING
5	2'-8" x 6'-8"	SWING
6	3'-0" x 6'-8"	SLIDING GARAGE
7	2'-0" x 6'-8"	BI-FOLD
8	3'-0" x 6'-8"	BI-FOLD
9	6'-0" x 6'-8"	BI-PASS
10	2'-8" x 6'-8"	POCKET
11	5'-0" x 6'-8"	BI-FOLD
12	16'-0" x 1'-0"	GARAGE
13	2'-6" x 4'-0"	CUT-DOWN
14	2'-6" x 6'-8"	BI-FOLD
15	3'-0" x 6'-0"	CUT-DOWN


WINDOW SCHEDULE

SYMBOL	TYPE	MANUF.	SIZE	R.O.	MATERIAL	FINISH	HEAD	JAMB	SILL	GLASS AREA	QTY	REMARKS
A	CASEMENT		2'-0" x 4'-0"	2'-1 1/2" x 4'-1"	ALUM.							UNLESS NOTED OTHERWISE ***
B	SLIDER		6'-0" x 4'-0"	6'-1 1/2" x 4'-1"								ALL HEADS TROUGH OPENINGS
C	SLIDER		6'-0" x 5'-0"									ARE 6'-3" AFF. ALL BEDROOM WINDOWS TO MEET UBC EGRESS
D	SLIDER-DOOR		6'-0" x 6'-8"									20' x 24" 5.74
E	FIXED		1'-6" x 1'-6"									
F	SLIDER		5'-0" x 4'-0"									
G	SLIDER-DOOR		8'-0" x 8'-0"									*** R.O. 6 T.B. AFF.
H	SLIDER		6'-0" x 6'-0"									
J	CASEMENT		2'-0" x 3'-0"									*** R.O. 6 T.B. AFF.
K	SLIDER		6'-0" x 3'-0"									
L	SLIDER-PATIO		4'-0" x 6'-8"									
M	CASEMENT		2'-0" x 2'-0"									

Window area of rooms to be 1/10 of floor area with min. of 10 sq. ft. Operable sections of windows to be 1/20th of floor area with min. of 5 sq. ft. Sec. 1205 (a)

Every sleeping room shall have an egress window with 5.7 sq. ft. min. operable area. Min. 20" wide and 24" high dimensions are required. Sill height max. 44" off floor Sec. 1204


Safety glazing required per Sec. 5406

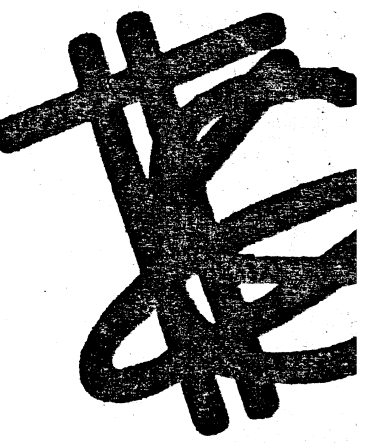

THEODORE ASSOCIATES

ARCHITECTS AND STRUCTURAL ENG

P.O. BOX 1640
23280 HWY. 82
BASALT, COLORADO 81611
PHONE (303) 927-3167
FAX (303) 927-4813

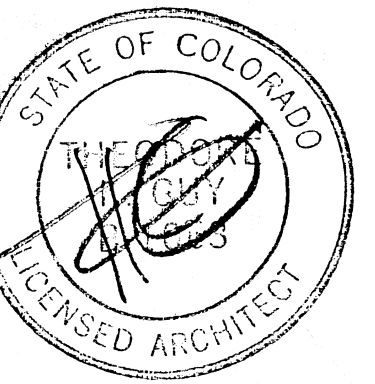

DATE 3/12/94 REM. TERM

MOUNTAIN H GROUP

LOT 640 C
TELLURIDE MOUNTAIN

JOB #: 93184
DRAWN: JLP
CHECKED:
PRINTED: 3/12/94

SHEET TITLE:
INFORMATION 5

A1.0

COPYRIGHT
THEODORE K. GUY ASSOCIATES